

SILVER ANKASTRE / RECESSED



Özellikler:

- Elektrostatik toz boyalı
- Metal dış çerçeve ve alüminyum profil gövde
- Alüminyum enjeksiyon soğutucu
- Polimer çerçeve
- Dikey ekseninde 30° ve yatay ekseninde 175° yönlendirilebilir
- 15°-30°-45° ışık açısı seçenekli %99,8 safılıkta parlak desenli alüminyum reflektör
- Yüksek geçirgenlikli temperli koruma camı

Specifications:

- Electrostatic powder coated
- Metal outer frame and extruded aluminium body
- Die cast aluminium heat sink
- Polymer frame
- Adjustability allows 30° rotation for the vertical axis and 175° tilting for the horizontal axis
- 15°-30°-45° beam angle options with %99,8 pured polished pattern aluminium reflector
- Extra clear tempered protection glass




Standard Version			
L AN4812030	1x20W	LED Modul	1895 gr.
L AN4812031	1x30W	LED Modul	1895 gr.
L AN4812032	1x40W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2300 gr.
L AN4812033	1x40W	LED Modul	Fanlı Soğutma / Cooling With Fan 2260 gr.
L AN4812034	1x50W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2300 gr.
L AN4812035	1x50W	LED Modul	Fanlı Soğutma / Cooling With Fan 2260 gr.
L AN4815030	1x20W	ZHAGA LED Modul	1895 gr.
L AN4815031	1x30W	ZHAGA LED Modul	1895 gr.

DALI DIMM Version			
L AN4812040	1x20W	LED Modul	1910 gr.
L AN4812041	1x30W	LED Modul	1910 gr.
L AN4812042	1x40W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2330 gr.
L AN4812043	1x40W	LED Modul	Fanlı Soğutma / Cooling With Fan 2290 gr.
L AN4812044	1x50W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2330 gr.
L AN4812045	1x50W	LED Modul	Fanlı Soğutma / Cooling With Fan 2290 gr.
L AN4815040	1x20W	ZHAGA LED Modul	1910 gr.
L AN4815041	1x30W	ZHAGA LED Modul	1910 gr.

Akülü; 1 saat kapasiteli / With 1 hour battery pack			
L AN4812050	1x20W	LED Modul	2100 gr.
L AN4812051	1x30W	LED Modul	2100 gr.
L AN4812052	1x40W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2650 gr.
L AN4812053	1x40W	LED Modul	Fanlı Soğutma / Cooling With Fan 2620 gr.
L AN4812054	1x50W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2650 gr.
L AN4812055	1x50W	LED Modul	Fanlı Soğutma / Cooling With Fan 2620 gr.
L AN4815050	1x20W	ZHAGA LED Modul	2100 gr.
L AN4815051	1x30W	ZHAGA LED Modul	2100 gr.

Akülü; 3 saat kapasiteli / With 3 hour battery pack			
L AN4812060	1x20W	LED Modul	2150 gr.
L AN4812061	1x30W	LED Modul	2150 gr.
L AN4812062	1x40W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2825 gr.
L AN4812063	1x40W	LED Modul	Fanlı Soğutma / Cooling With Fan 2720 gr.
L AN4812064	1x50W	LED Modul	Hava pompalı soğutma / Cooling with Air pump 2825 gr.
L AN4812065	1x50W	LED Modul	Fanlı Soğutma / Cooling With Fan 2720 gr.
L AN4815060	1x20W	ZHAGA LED Modul	2150 gr.
L AN4815061	1x30W	ZHAGA LED Modul	2150 gr.

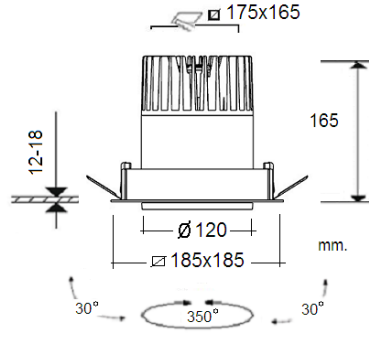
Lamba/LampRenk Seçenekleri / Color OptionsLED Modul
3000KZHAGA LED Modul
3000K - 4000KLed Bilgileri/LED Information**LED Modul**

Işık rengi Color temperature K	Güç tüketimi Consumed power W	Çalışma akımı Input current mA	Çalışma gerilimi Input voltage V	Lumen değeri Lumen output lm(tc: 55°C)	Min. Renksel geriverim Min. Color rendering ra
3000	20	500	36	2000	%80
3000	30	850	38	3500	%80
3000	40	1050	37	4500	%80
3000	50	1200	38	4900	%80



ZHAGA LED Modul

Işık rengi Color temperature K	Güç tüketimi Consumed power W	Çalışma akımı Input current mA	Çalışma gerilimi Input voltage V	Lumen değeri Lumen output lm(tc: 55°C)	Min. Renksel geriverim Min. Color rendering ra
3000	20	500	43	2625	%80
4000	20	500	43	2690	%80
3000	30	700	44	3551	%80
4000	30	700	44	3645	%80



* Minimum LED ömrü 50.000 Saat / Minimum LED life time 50.000 Hours

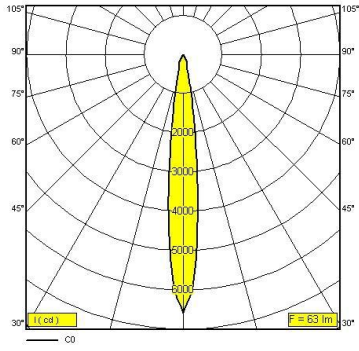



15° 40W (3000K)

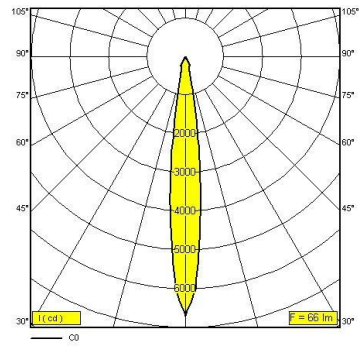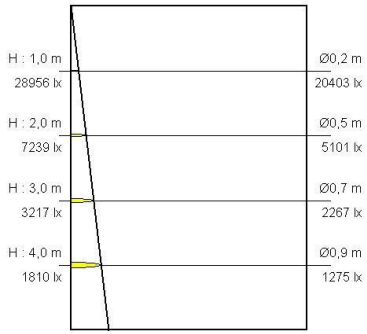



15° 50W (3000K)

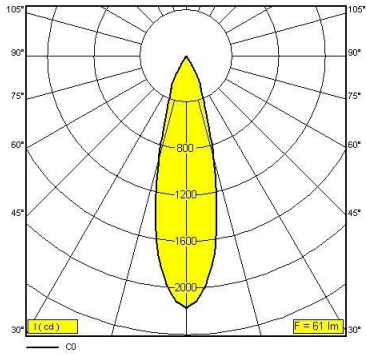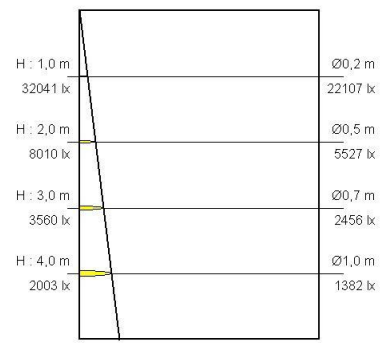



30° 40W (3000K)

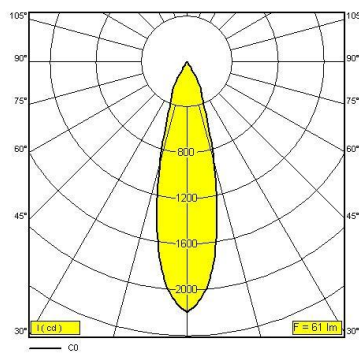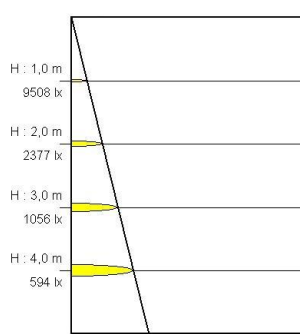


30° 50W (3000K)

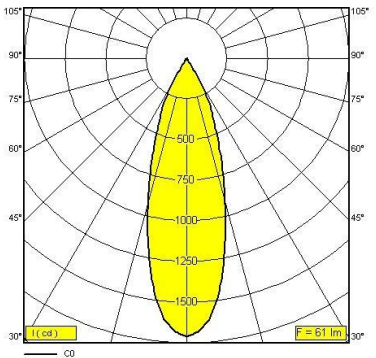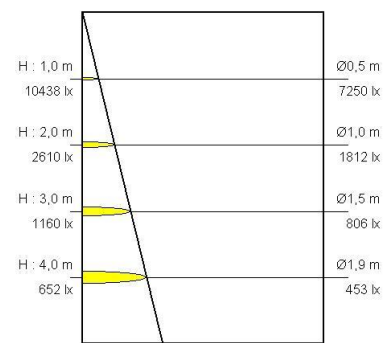


45° 40W (3000K)

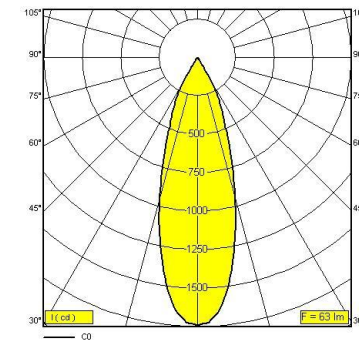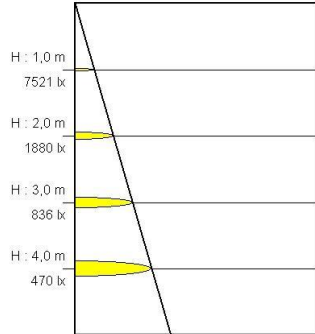

45° 50W (3000K)

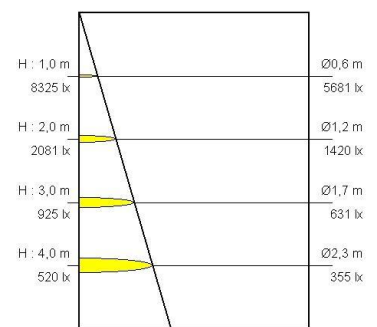


ZHAGA LED Modul

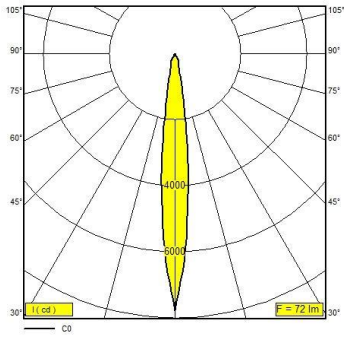


H : 1,0 m	20901 lx	Ø0,2 m	14115 lx
H : 2,0 m	5225 lx	Ø0,4 m	3529 lx
H : 3,0 m	2322 lx	Ø0,7 m	1568 lx
H : 4,0 m	1306 lx	Ø0,9 m	882 lx

15° 20W (3000K)

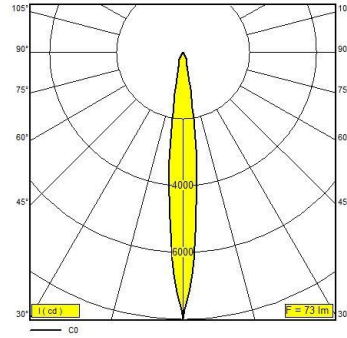


H : 1,0 m	27762 lx	Ø0,2 m	18692 lx
H : 2,0 m	6940 lx	Ø0,4 m	4673 lx
H : 3,0 m	3085 lx	Ø0,7 m	2077 lx
H : 4,0 m	1735 lx	Ø0,9 m	1168 lx

15° 30W (3000K)

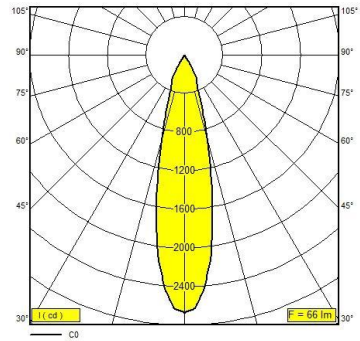


H : 1,0 m	7215 lx	Ø0,4 m	5054 lx
H : 2,0 m	1804 lx	Ø0,9 m	1264 lx
H : 3,0 m	802 lx	Ø1,3 m	562 lx
H : 4,0 m	451 lx	Ø1,7 m	316 lx

30° 20W (3000K)




H : 1,0 m	9472 lx	Ø0,5 m	6397 lx
H : 2,0 m	2368 lx	Ø0,9 m	1599 lx
H : 3,0 m	1052 lx	Ø1,4 m	711 lx
H : 4,0 m	592 lx	Ø1,8 m	400 lx

30° 30W (3000K)

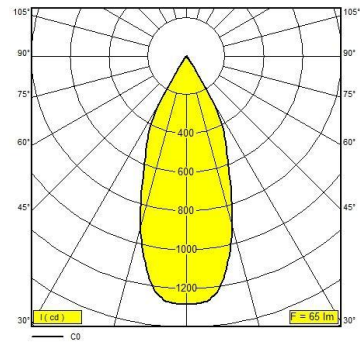


H : 1,0 m	3485 lx	Ø0,7 m	2356 lx
H : 2,0 m	866 lx	Ø1,5 m	589 lx
H : 3,0 m	385 lx	Ø2,2 m	262 lx
H : 4,0 m	217 lx	Ø3,0 m	147 lx

45° 20W (3000K)




H : 1,0 m	4582 lx	Ø0,7 m	3095 lx
H : 2,0 m	1146 lx	Ø1,5 m	774 lx
H : 3,0 m	509 lx	Ø2,2 m	344 lx
H : 4,0 m	286 lx	Ø3,0 m	193 lx

45° 30W (3000K)




H : 1,0 m	Ø0,2 m	21520 lx	14533 lx
H : 2,0 m	Ø0,4 m	5380 lx	3633 lx
H : 3,0 m	Ø0,7 m	2391 lx	1615 lx
H : 4,0 m	Ø0,9 m	1345 lx	908 lx

15° 20W (4000K)




H : 1,0 m	Ø0,2 m	28555 lx	19226 lx
H : 2,0 m	Ø0,4 m	7139 lx	4806 lx
H : 3,0 m	Ø0,7 m	3173 lx	2136 lx
H : 4,0 m	Ø0,9 m	1785 lx	1202 lx

15° 30W (4000K)

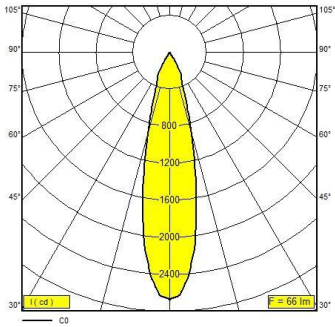


H : 1,0 m	Ø0,4 m	7429 lx	5204 lx
H : 2,0 m	Ø0,9 m	1857 lx	1301 lx
H : 3,0 m	Ø1,3 m	825 lx	578 lx
H : 4,0 m	Ø1,7 m	464 lx	325 lx

30° 20W (4000K)

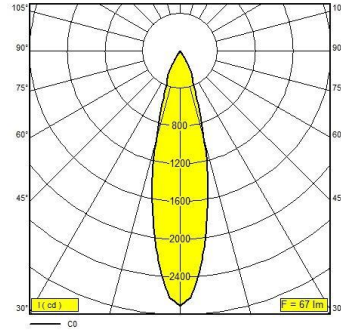


H : 1,0 m	Ø0,5 m	9743 lx	6580 lx
H : 2,0 m	Ø0,9 m	2436 lx	1645 lx
H : 3,0 m	Ø1,4 m	1083 lx	731 lx
H : 4,0 m	Ø1,8 m	609 lx	411 lx

30° 30W (4000K)

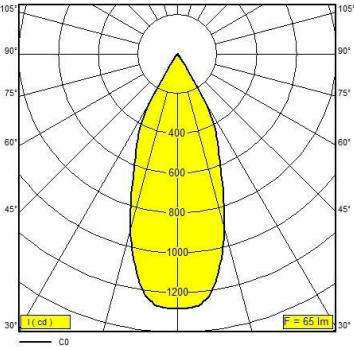

H : 1,0 m	Ø0,7 m	3567 lx	2426 lx
H : 2,0 m	Ø1,5 m	892 lx	606 lx
H : 3,0 m	Ø2,2 m	396 lx	270 lx
H : 4,0 m	Ø3,0 m	223 lx	152 lx

45° 20W (4000K)

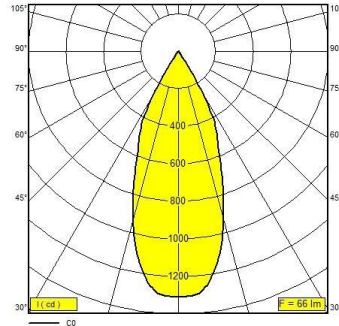

H : 1,0 m	Ø0,7 m	4713 lx	3183 lx
H : 2,0 m	Ø1,5 m	1178 lx	796 lx
H : 3,0 m	Ø2,2 m	524 lx	354 lx
H : 4,0 m	Ø3,0 m	295 lx	199 lx

45° 30W (4000K)

Işık ölçümleri ürünün maksimum değerleridir./ Light measurements are the maximum values of the product.