

TREND S





Spezifikation:

- Leuchtgehäuse Aluminium strang-gepresst
- Pulverbeschichtet
- Reflektor %99,8 pur Aluminium Hochglanz oder Matt
- Reflektionsgrad 15°, 30°, 36°, 45°
- Acrylreflektor
- 3-Phasenuniversaladapter
- inkl. Betriebsgerät
- Schutzglas
- Farbe: weiß (03), RAL9006 (00), schwarz (04)

Specification:

- extruded aluminium body
- electrostatic powder coated
- %99,8 pure Aluminium reflector polished or matt
- 15°, 30°, 36°, 45° reflector angle
- acrylic reflector
- 3-phase track adaptor
- incl. Control Gear
- tempered protection glass
- colour: black, white, grey



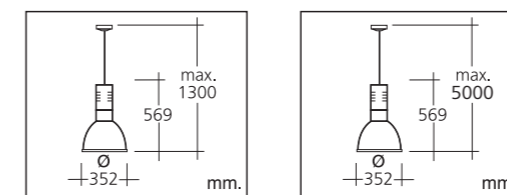
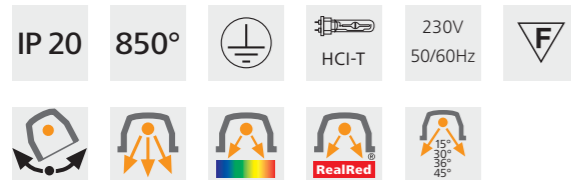


mit 3-Phase Multi Adapter

Anbau

Facettenreflektor Glanz
Polished pattern reflector

- RF110101 - 15°
- RF110102 - 30°
- RF110104 - 36°



Facettenreflektor matt
Matt pattern reflector

- RF110103 - 45°

TYP	TREND S (Ø 352x569)			
	LSK1311001	LSK1311002	LSK1312001	LSK1312002
Bezeichnung / Luminaire Code				
Watt / Watt	1 x 35W	1 x 70W	1 x 35W	1 x 70W
Lampe / Lamp	HCI-T	HCI-T	HCI-T	HCI-T
Fassung / Lampholder	G12	G12	G12	G12
Betriebsgerät / Control Gear	E	E	E	E
Gewicht gr / Weight gr	3066	3066	3075	3075
Adapter / Adaptor	Anbau	Anbau	3-Phase Multi	3-Phase Multi
Reflektor / Reflector	15°, 30°, 36°, 45°	15°, 30°, 36°, 45°	15°, 30°, 36°, 45°	15°, 30°, 36°, 45°

Bestellbeispiel: LSK1311001 1 x 35W EVG, Farbe weiß, Reflektor 30°= 1 x LSK1311001.03.30